

# General Alarm Siren

## Model A



### ELECTROMECHANICAL SIREN

- Available with 120VAC/VDC universal motor
- Rugged, durable and corrosion resistant
- Maintenance-free
- UL Listed, CSA Certified, FM Approved
- Produces 108dB @ 10' (118dB @ 1m)
- NEMA 3R, IP40 enclosure

The Federal Signal Model A is a general-purpose electro-mechanical siren that produces a distinctive sound and tonal quality for industrial applications. It has a high maximum pitch which provides excellent contrast to industrial ambient noise. Introduced in 1918, the Model A is still used today in many rugged and extreme environments and applications.

The Model A features a universal motor and operates with 120VAC or 125VDC. The fractional horsepower motor drives a ported aluminum rotor within the specially designed stator to produce a unique sound. A small internal fan cools the motor during operation. The recommended duty cycle is five minutes on/five minutes off. This siren produces an attention-getting 108dB @ 10' (118dB @ 1m) and 1060Hz at full R.P.M.


The Model A's metal housing is sealed with red powder coat for an attractive appearance and superior corrosion resistance. The swivel mount bracket accommodates wall and surface mount installations.

The Model A is UL Listed, CSA Certified and FM Approved.

Model	Voltage	Operating Current	Decibels @		Frequency
			10'	1m	
A	120VAC/VDC	1.8 amps	108	118	1060Hz



**GENERAL ALARM SIREN (A)**

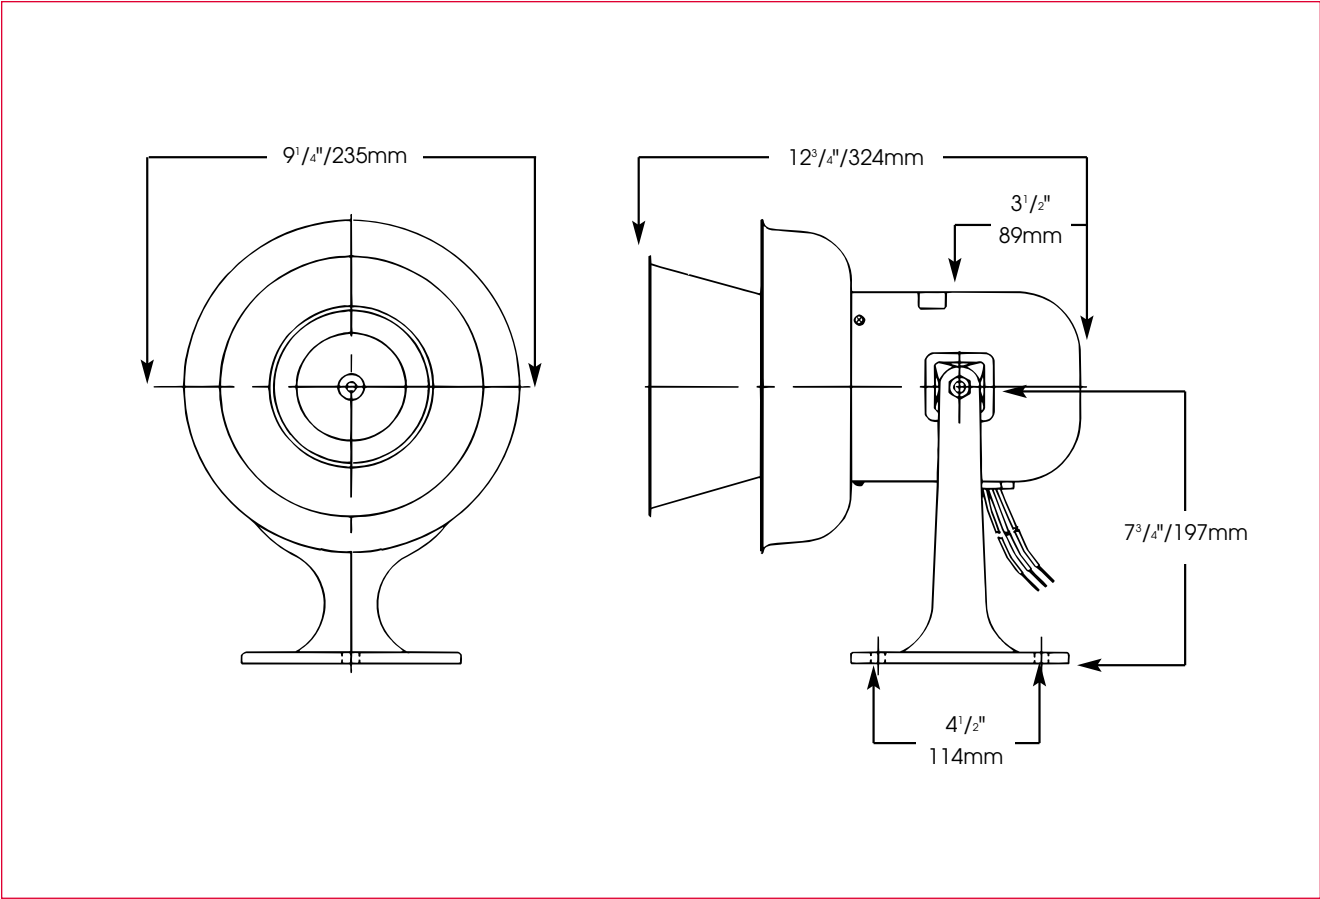

**SPECIFICATIONS**

Voltages:	120VAC/VDC	120VAC/VDC
Motor:	Universal	Universal
Net Weight:	9 lbs.	4.1 kg
Shipping Weight:	11.6 lbs.	5.3 kg
Width:	9.25"	235 mm
Length:	12.75"	324 mm

**HOW TO ORDER**

- Specify model and voltage