



# Vibratone® Horns

## Model 350WB

### DESIGNED FOR ROUTINE SIGNALING USES

- Effective range 200 feet (61m)
- Reproduces coded or sustained tones
- 120 and 240VAC
- Produces 100dB @ 10' (110dB @ 1m)
- UL Listed, cUL Listed, CSA Certified, FM Approved
- NEMA 4X, IP65 enclosure

The Model 350WB (AC current) Vibratone® horn produces sound by the electro-mechanical vibration of a stainless steel diaphragm. The horn mechanism with diaphragm is attached to the grille. Indoor or outdoor use is made possible by the water- and dust-tight backbox.

The 350WB is available in 120 or 240VAC for 50/60Hz. The sound output level is 100dB nominal at ten feet (110dB @ 1m).

These Federal Signal horns accommodate surface, flush or semi-flush mounting on walls, panels, in cabinets.


Model 350WB features a die-cast zinc housing sealed with a gray enamel finish. The rugged outer housing resists vandalism without reducing sound output. Model 350WB is fused and utilizes a terminal block connection. The horn and backbox combination is UL and cUL Listed (Underwriters Laboratories), CSA (Canadian Standards Association) Certified and FM Approved.

Capable of reproducing coded blasts or sustained tones, Federal Signal's Vibratone horns are excellent for general alarm, start/dismissal, coded paging and process control signaling in areas where their sound output exceeds ambient noise levels. Compact size and various installation options make them ideal for institutional use.

Model	Voltage	Operating Current	Decibels @	
			10'	1m
350WB	120VAC 50/60Hz	0.18 amps	100	110
350WB	240VAC 50/60Hz	0.09 amps	100	110



**VIBRATONE® HORN (350WB)**

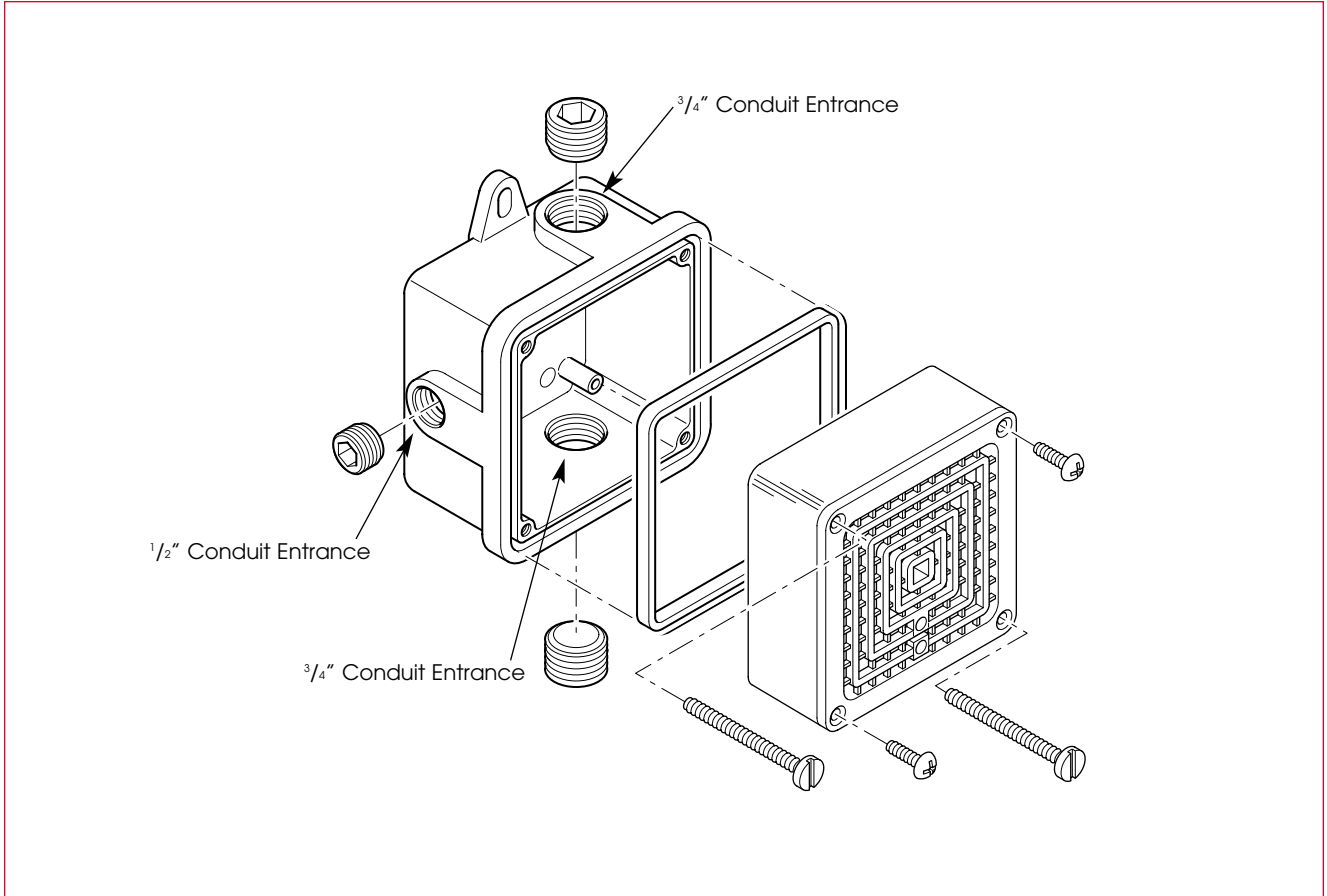

**SPECIFICATIONS**

Operating Temperature:	-65°F to 150°F	-54°C to 66°C
Net Weight:	2.7 lbs.	1.2 kg
Shipping Weight:	2.8 lbs.	1.2 kg
Height:	5.3"	115 mm
Width:	5.3"	115 mm
Depth:	3.66"	92.9 mm

**HOW TO ORDER**

- Specify model and voltage